

SmartSonic "Mini-Probe" Ultrasonic Transmitters

BINMASTER

7201 N. 98th Street
Lincoln, NE 68507
Phone: 800-278-4241
E-Mail: info@binmaster.com

Features

- Standard 5 feet of interconnection cable
- Easy two point push-button calibration
- Output 4 to 20 mA signal
- Built-in temperature compensation
- RS-485 communications with calibration and diagnostic utility software
- Optional High Level Alarm relay dual pole output 5A/230 VAC
- PLC compatible
- Three Wire Operation


Applications

- Food & Beverage
- Water
- Pharmaceutical



The SmartSonic Mini-Probe is a general purpose ultrasonic transmitter with a 6 foot range.

Top View of Transmitter with Interconnection Diagram

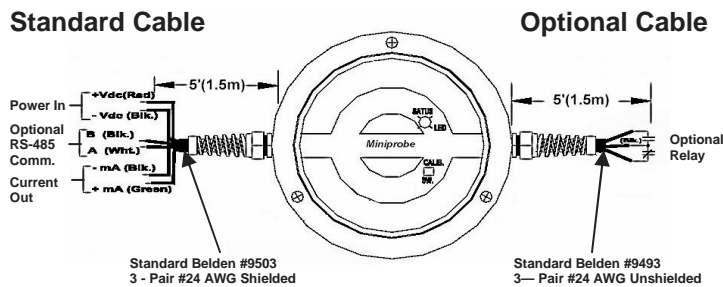

Mechanical

Std. Interconnection Cable

- 5' - Belden #9403 : 3 Pair-24AWG
- 1) Supply 12—30 VDC 1 pair shielded (Red/Blk.)
 - 2) Output 4—20 mA 1 pair shielded (Blk./Green)
 - 3) Comm. RS-485 1 pair shielded (Blk./Wht.)

Optional Relay Cable

- 5' Belden #9493 : 3-18 AWG Unshielded
- 1) Relay (optional) DPST 5A/230 VAC

Enclosure

PVC-94V0
Ingress Protection NEMA 4X (IP65)

Environmental

Temperature: -40 to 266° F (-40 to 130° C)
Pressure: 1-10 bar
Approvals: Installation Category Class II


Operational

Accuracy: +/- 0.25% of max. range
Beam Angle: 10°-12° conical at -3dB
Loss of echo: Hold 30 seconds, 22 mA
Temperature Compensation: Continuous in transducer
Calibration: Push-button or programmable via optional communication port
Diagnostics: Via communication port
High Level Alarm: 5A relay has hysteresis and delay of 5% of tank height. Relay's state changes at full tank calibration point.

Electrical Specifications

Power: 12 to 30 VDC, 0.07 A max @ 24 VDC
R load = (Vs-6) 24 mA
Output: 4-20 mA Output 6.1 uA resolution
RS-485 communication
Optional: Relay DPST 5A / 230 VAC

Mounting Dimensions

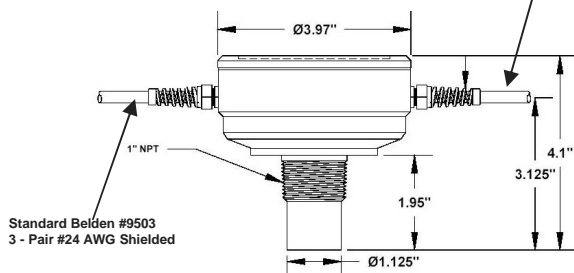

Technical Specifications

MODEL	RANGE	RESOLUTION	MOUNTING FERRULE
SS300-148UMC4	0.33—6 ft 0.10—1.8 m	0.03"	1.0"

HVS
PRECONISATEUR DE SOLUTIONS DEPUIS 1986

2 rue René Laennec 51500 Taissy France
Fax: 03 26 85 19 08, Tel : 03 26 82 49 29

E-mail: hvssystem@hvssystem.com
Site web : www.hvssystem.com